

REFERENCE STANDARD 2A/2B



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Drivers: For each channel:
Two 10-inch polypropylene woofers.
Three EMIT tweeters, one facing rearward, and three EMIM midrange drivers
- Frequency Response: 29 to 32,000 Hz ± 2 dB
Suggested for use with amplifiers or receivers of: 60 through 250 watts per channel RMS
- Crossover Frequencies: 150Hz, 800 Hz, 4,000 Hz, and 8,000 Hz
- Nominal Impedance: 4 ohms
- Finish: Hand rubbed oak veneers and solids
- Dimensions: 48 inches x 22 3/4 wide x 18 deep
(160.6 cm x 66.25 wide x 36.25)
- Shipping Weight: 200 lbs per system

PRODUCTION HISTORY:

- Introduced in 1984
- Discontinued in 1987
- Original Retail Price: 2,700.00 System

PHYSICAL SPECIFICATIONS:


COSMETIC PARTS:

Grille Assy.	.025...1986B
--------------	--------------

CROSSOVER PARTS:

Pot 5 Ohm 5W	.145...0103
Pot 5 Ohm 25W	.145...0110
Fuse Holder	.550...0363
Fuse 1.25A AGC	.870...0010
Fuse 2.5A AGC	.870...0024
AC Adaptor 110-14V	NLA
Active Crossover	NLA
DRIVERS (TRANSDUCERS)	
EMIM Mid Rev. B/C	.902...0012B
10" WFR Poly Clear	.902...2279A (Substitute only)
EMIT Twt Sq/Blk	.902...5086
Diaph Assy. Kit Tweeter	.751...3722
EMIT Diaph. Assy. Midrange	.751...3806


TECHNICAL SPECIFICATIONS

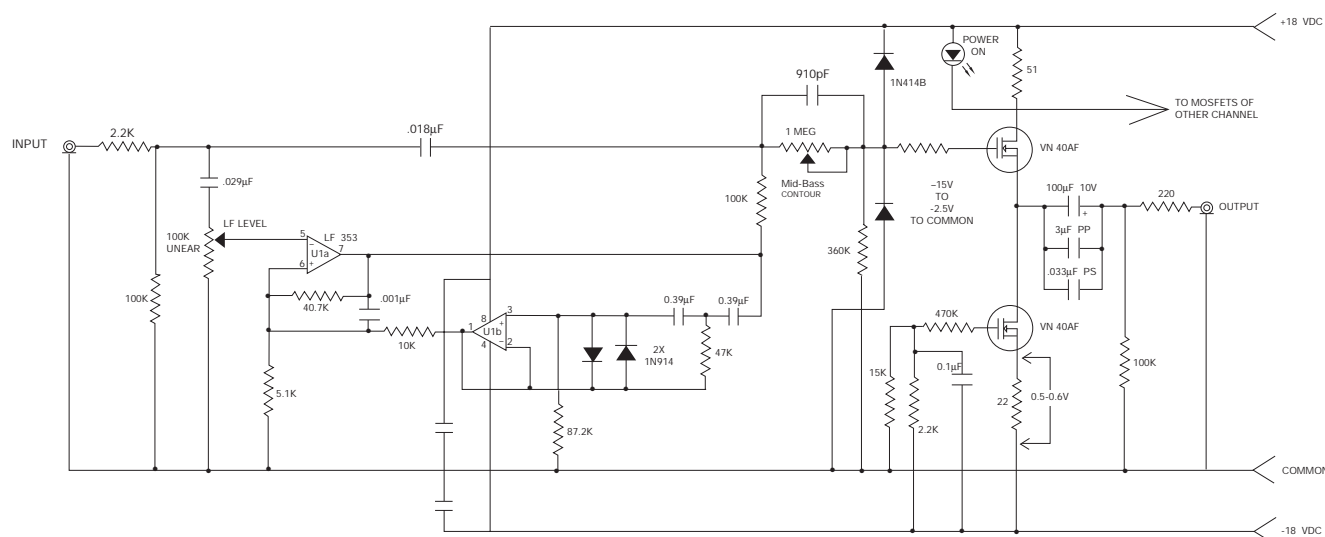

REFERENCE STANDARD2A/2B

REFERENCE STANDARD 2A/2B

TECHNICAL SPECIFICATIONS

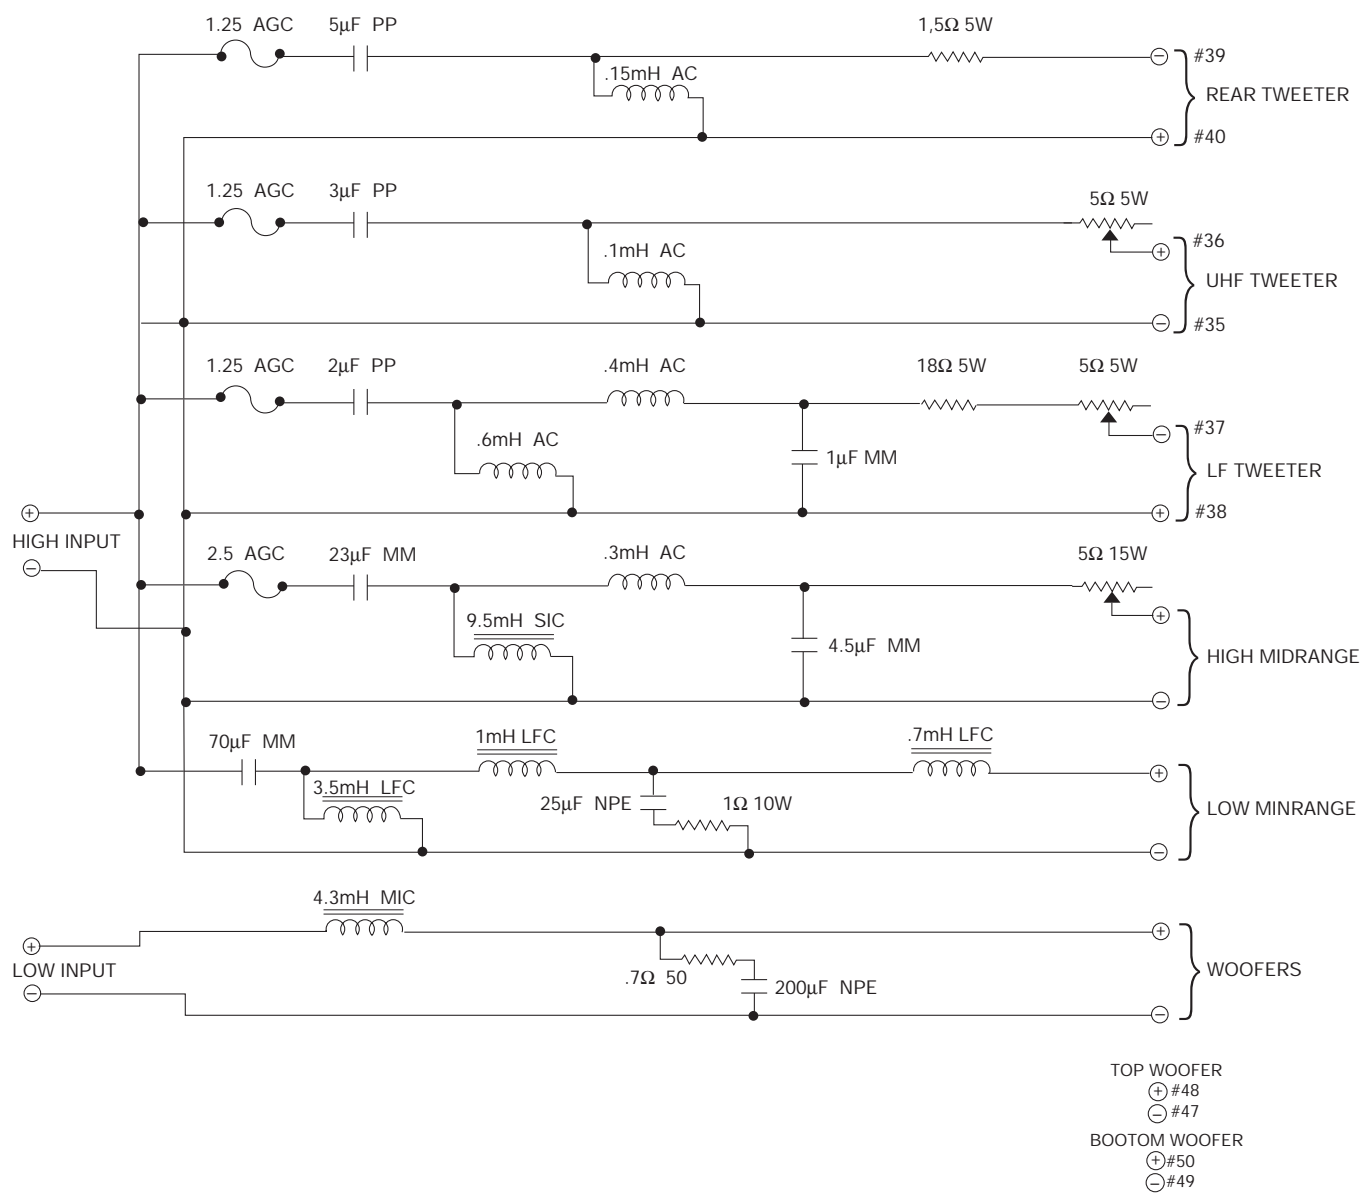

REFERENCE STANDARD 2A/2B

REFERENCE STANDARD 2A/2B

TECHNICAL SPECIFICATIONS

